

Name I.C. LEWIS / T. PIRRO
Notebook Number 195-130
Subject CHEMISTRY OF RAW MATERIALS, NEW BINDERS, + IMPREGNANTS
Dates From _____ To _____

THIS BOOK IS THE PROPERTY OF
UCAR Carbon Company Inc.
12900 Snow Road
Parma Ohio 44130

TABLE OF CONTENTS

Subject	Page:
1 st VI of 195-129-97 #3-2-B w/Silica (II) oxide, Colloidal dispersion (ck comp BP)	01-02
VI of 195-129-98 #4-13-A1 w/ 195-129-53 (60/50 vol/o GP-5432/Furfural) (ck comp BP)	03-04
" " " " #4-13-B1 " / " " " " " " " " " ") (" " ")	05-06
Inert Data - Graphitized ck composites via BP Process (4 th Tral, v3200C) (ck comp BP)	07
VI of 195-130-07 #4-13-A2 w/ 195-129-53 (50/50 vol/o GP-5432/Furfural) (ck comp BP)	08-09
" " " " " #4-13-B1 " / " " " " " " " " " ") (" " ")	10-11
Drying of ~10g samples of Aluminum oxide, colloidal dispersion, 20% in H ₂ O (cathodes)	12-13
1 st VI of 195-123-86 #9 w/ Al ₂ O ₃ , colloidal dispersion, 20% in H ₂ O (Cat. Al ₂ O ₃)	14-15
" " " " " #10 " " " " " " " " " ") (" " ")	16-17
2 nd VI of 195-130-15 #9 w/ Al ₂ O ₃ , colloidal dispersion, 20% in H ₂ O (" " ")	18-19
Briefed RTV-30, RTSO, 72 Mod MCC (2-stage cure) of PLYOPHEN 43703 Resin. (Grattech Resins)	20-22
" " " " " " " " " " " " " " " ") (" " ")	23-24
" " " " " " " " " " " " " " " ") (" " ")	25-26
Briefed (LVT) Viscosity vs. Time at R.T. of GP-5432 Resin (T-143)	27-28
2 nd VI of 195-130-17 #10 w/ Al ₂ O ₃ , colloidal dispersion, 20% in H ₂ O (Cat. Al ₂ O ₃)	29-30
3 rd VI of 195-130-19 #9 " " " " " " " " " ") (" " ")	31-32
3 rd VI of 195-130-30 #10 " " " " " " " " " ") (" " ")	33-34
Order Form for Koppers Mesophase Pitch & Precursor Distillate (Koppers)	35
%MCC Determinations of WFE Distillate #00-1718 (A01-01805) (Koppers)	36
4 th VI of 195-130-32 #9 w/ Al ₂ O ₃ , colloidal dispersion, 20% in H ₂ O (Cat. Al ₂ O ₃)	37-38
Anneal - 400°C, 30 min in N ₂ flow of WFE mesophase pitch #01-1037c (A01-01807) (Koppers)	39
4 th VI of 195-130-34 #10 w/ Al ₂ O ₃ , colloidal dispersion, 20% in H ₂ O (Cat. Al ₂ O ₃)	40-41
Hist Stage Microscopy of WFE Mesophase Pitches #01-1020 H & #01-1037c (KOPPERS)	42
" " " " " WFE Distillate #00-1718 (A01-01805) (" " ")	43
Summary Graph - Cumulative %wt Pickup per VI/Drying Cycle - Al ₂ O ₃ (Cat. Al ₂ O ₃)	44
Certificate of Analysis For GP-2160 (A01-01879) (Grattech Resins)	45
Briefed RTV-30, RTSO, 72 Mod MCC (2-stage cure) of GP-2160 (A01-01899) (" " ")	46-47
GPC Data of WFE Distillate #00-1718 (A01-01805) (Koppers)	48-49
Batch Heat Treats (BCT) of WFE Distillate #00-1718 (A01-01805) (Koppers)	50-53
%Mod MCC (2-stage cure) of C-61 Cement #1 (+40ppm H ₂ O) (Grattech Resins)	54-55
" " " " " " " " " " " #4 (+44ppm H ₂ O) (" " ")	56-57
" " " " " " " " " " " #2 (+42ppm H ₂ O) (" " ")	58-59
" " " " " " " " " " " #3 (+44ppm H ₂ O) (" " ")	60-61
Re-identification (ie. New Numbers) for Primary & Secondary Graphites (CURRO)	62
Graphitization of 195-129-93 #3-1-B, 195-129-100 #3-2-A, & 195-130-02 #3-2-B (ck comp BP)	63-64
TGA Data calc/mate ~400°C of Corrosal 433Z02 (A01-01480) (T-143)	67
" " " " " " " " " " " C-44 Cement (A01-01717) (Grattech Resins)	68
" " " " " " " " " " " GP-2160 (A01-01899) (" " ")	69
" " " " " " " " " " " WFE Distillate #00-1718 (A01-01805) (Koppers)	70
Viscosity & ΔEvis Calculation of VFT 170 Mod. Pitch (Lawrenceburg 10/4/01) (ck comp BP)	71-73
TGA Data - 100/min, 800PSI to ~450°C of Corrosal 433Z02 (A01-01480) (T-143)	74-75

PDS C Data - 10°C/min to ~450°C, 800 PSI of GP-2160 (Factory A, 9/16/90)	(Gr. Tech. Room)	76-78
Initial Data - c/c composite via BP process (1 st Trial - no graph)	(c/c comp BP)	79
Preparation of ~500 ml of 50/50 by volume GP-5432/Furformal	(c/c comp BP)	80
1 st VI of 195-130-79 #1-7-A w/ 195-130-80 (50/50 by vol. GP-5432/Furformal)	(" " ")	81-82
Vendor Data + Correspondence of Green CSMB (UH-10-18) A01-02277	(China Steel)	83
Heat Treat - 500°C, 1 hr, N ₂ of Green CSMB (UH-10-18) A01-02277	(" ")	84
2 nd VI of 195-130-82 #1-7-A w/ 195-130-80 (50/50 by vol. GP-5432/Furformal)	(c/c comp BP)	85-86
PDS C Data - 10°C/min to ~450°C, 800 PSI of C-44 Cement (A01-01717)	(Gr. Tech. Room)	87-89
TGA Data - 10°C/min to ~700°C of GP-7648 Phenolic Resin Batch #2189 (A01-02136)	(" ")	90-91
PDS C Data - 10°C/min to ~450°C, 800 PSI of " " " " " "	(" ")	92-94
TGA Data - 10°C/min to ~700°C of C-60A Cement Sample #1 (A01-02137)	(" ")	95-96
" " " " " " " " " " " " Sample #2 (A01-02138)	(" ")	97-98
Carbonization (Balce) - 20°C/hr 60-800°C, 5 hr hold of A-240 P. 44 (test PI simulator) (Cathodes)		99

Subject 2nd VI 195-129-97 #3-2-B w/ Silicon (II) oxide, colloidal dispersion (c/c COMP BP) 1
 Cross-Reference (if any)

Purpose:

Ref. 195-129-99

Materials:

- 1) c/c composite 195-129-97 #3-2-B. (c/c composite via BP process from the 2nd block of the 3rd Lawrenceburg trial. 0.25" long K-223-SE pitch fibers. Reilly 155 g. tub. Load ratio = 75 lbs w/b sulfur. VIed in w/ SiO₂ colloidal dispersion \Rightarrow hot vac. dried. Wt(w) = 861.58g, Vol(w) = 571.40cc, Den(w) = 1.508 g/cc, Wt(pvd-1) = 903.59g, Current Den = 1.581 g/cc
- 2) Impregnant: Silicon (II) oxide, 30% in H₂O, colloidal dispersion. (Alfa-Aesar) Lot # A04K09. 0.01 μ m particles, in liquid. SA = 320 m²/g, Density = 1.20, Loss Ureed = 7/26/01
 vis(w) = 7.7 cps at 82.1 °F, SG(w) = 1.216 at 82.1 °F

Apparatus:

Ref. 195-120-15

Procedure:

Ref. 195-120-15+16 * Processed w/ 195-129-97 #3-2-A

Pump-Down Data: (7/27-30/01) - Process w/ 195-129-97 #3-2-A

DATE	TIME	PRESS (mm)	Comments
7/27	8:40	16	Load block from hot vac. oven (~166 °C, 0.3mm)
"	8:50	"	Begin pump-down
"	10:00	22	Sample is dry \Rightarrow VI today
"	10:45	14	Charge traps w/ dry ice - acetone
"	11:45	9	LDR
"	13:00	9	Begin VI

Impregnation Data: (7/27-30/01) - LDR w/ traps charged.

LDR: Initial = 9 m Torr Vis(w) = 8.0 cps at 76.2 °F Prop. Time = 13:00 (9 m Torr)
 5 min = 21 " SG(w) = 1.220 at 76.2 °F Unload Time = 8:00 (7/30/01)
 10 min = 30 " Held at atmospheric pressure for ~ 67 hrs.
 15 min = 41 "

Comments:

~450 cc of impregnant in the 500 cc cylindrical funnel.

Post-Impregnation Data: (7/30/01)

Wt (PVI-2) = 1011.33g \Rightarrow Wt Pickup = 107.74g \Rightarrow Wt% Pickup = (11.92), Vol% Pickup = (15.43)

Performed and Recorded by:

Directed by:

Read and Understood by:

Date

Date

Date

2

Subject ^{2nd VI of 195-129-97 #3-2-B w/ silicon (IV) oxide colloidal dispersion (ck comp BP)}
 Cross-Reference (if any)

Drying Data: (7/30-31/01) - Over set "29" (50%). Argon purge at 5.0 SCFH (AIR)

	TIME	OVEN TEMP	PRESS (mm)	Comments
*	8:20	112	Atm	Load over; # to bot, rear of tray. Over set "29" (50%). Argon purge 5.0 SCFH (AIR)
- (3)	11:20	114	"	Unload over. Set over at "38" (50%). Weigh block hot.
	-	-	-	Wt = 981.44g \Rightarrow Wt Pickup = 77.85g \Rightarrow Wt/L Pickup = <u>8.62</u> (Yd = <u>72.3%</u>)
*	11:30	108 (N)	Atm	Load over; # to top, front of tray. Over set "38" (50%). Argon purge 5.0 SCFH (AIR)
(2)	13:30	130	"	Unload over. Set over at "46" (50%). Weigh block hot. Install new gasketing
	-	-	-	Wt = 942.14g \Rightarrow Wt Pickup = 38.57g \Rightarrow Wt/L Pickup = <u>4.27</u> (Yd = <u>35.8%</u>)
*	14:00	135 (A)	741.3	Load over; # to bottom, rear of tray. Vac. pump on. Argon purge off.
- (18)	8:00	166	0.3	Vac. pump off. Pressurize w/ argon. Set over at "48" (50%)
	-	-	-	Wt = 929.57g \Rightarrow Wt Pickup = 25.98g \Rightarrow Wt/L Pickup = <u>2.88</u> (Yd = <u>24.1%</u>)

Comments:

1) After 3 hrs, ~113°C, atm. pressure;

Set over at "38" (50%). Patches of white residue, more than 195-129-100 #3-2-A, on exterior faces (i.e. SiO₂). Rotate 180°; # to ~~bottom~~ top, front of tray

2) After 2 hrs, ~130°C, atm. pressure;

Set over at "46" (50%). Wipe condensed H₂O from oven door. Remove old gasketing and install new.

3) After 18 hrs, ~165°C, vacuum;

Set over at "48" (50%). Very small amount of white solid (SiO₂) beneath this block. Powdery, white residue on exterior faces, more than 195-129-100 #3-2-A.

Comments:

As w/ the #3-2-A sample the impregnant's % in situ weight yield is lower than expected (i.e. ~31%) \Rightarrow run-out, or the previous SiO₂ from the 1st VI was dissolved during the 2nd VI.

Cumulative Wt Pickup = 67.99g \Rightarrow Cumulative % Wt Pickup = 7.89
 Previous " " " = 42.01g \Rightarrow Previous % Wt Pickup = 4.88

Label 195-~~129~~-2 #3-2-B

Performed and Recorded by

Directed by: J. C. Lee

Read and Understood by:

Date

Date

Date

Subject 195-129-98 #4-13-A1 w/195-129-53 (sub by vol 3422/Retinal) (ch. comp 33) 3
Cross-Reference (if any)

Purpose:

To determine the composition, properties, etc. phenolic resin/fiberglass blend. Prepared one is in L. cells.

Materials:

- 1) the composite: 195-129-98 #4-13-A1 (ch. composite via B/P process from the 13th block of the 4th Lawrenceburg trail. 0.25" long, pitch Fibers + Reilly 105 Fibers. Lead ratio = 25/25 w/o solvent. Empirical end to ~3000°C., $\text{Wt.} = 277.03\text{g}$, $\text{Vol.} = 162.42\text{cc}$, $\text{Dens.} = 1.70\text{g/cc}$. Notes: This material had 1 P and rebar prior to graphitization.
- 2) Impregnant: 195-129-53 (sub by vol. 69-1432/Furinal). Prep. 5/40/01, last used: 5/17/01 since not impregnated. $\text{Vis.} = 17.4\text{cps at } 74.5^\circ\text{F}$, $\text{S.G.} = 1.188 \text{ at } 74.5^\circ\text{F}$, $\text{Hard.} = 34.4$ ($T = 0.26, n = 3$)

Apparatus:

Q5, 195-129-10

Process:

Ref. 195-129-15312 * Process = 0 w/195-129-98 #4-13-A1

Imp. Lower Data: (7/30/01)

DATE	Time	Press (atm)	Comments
7/30	7:50	16	Load from warehouse at atm. pressure.
"	8:00	"	
"	9:00	30	⇒ samples are dry
"	11:05	22	Charge traps w/ethylene-glycol to m.
"	11:35	12	LPD
"	13:15	"	Begin XT

Impregnation Data: (7/30 + 31/01) - L.D. w/ traps charged.

LPD: Initial = 12 mTorr $\text{Vis.} = 20.1\text{cps at } 70.8^\circ\text{F}$

5 min = 25 " $\text{S.G.} = 1.174/\text{cf at } 70.8^\circ\text{F}$

10 min = 34 "

15 min = 44 "

Prep Time = 13:15 (12 mTorr)

Unloaded Time = 8:15 (7/31/01)

Held at atmospheric pressure

for ~17 hrs

Comments:

400 ml of impregnant in 500 ml cylindrical funnel.

Post Impregnation Data: (7/31/01)

Graph: Ref. 195-130-03

Wt. (PVE-N) = 317.11g ⇒ Wt. Pickup = 40.06g ⇒ Wt. to Pickup = 14.47, Wt. to Pickup = 26.61

Performed and Recorded by: [Signature]

Directed by: [Signature]

Read and Understood by:

Date

Date

Date

4

Subject

Cross-Reference (if any)

VI₂ Core (~202°C) of 195-129-98#4-13-A1 w/ 195-129-53

(Clickmap BP)

Curing Data: (7/31 + 8/1/01) - Cured w/ VI₂ of 195-129-98#4-13-B1. Samples placed on s.s. screen over small Al pan to determine amount of run-out.

Al Pan + Screen wt (7) = 191.07g

	TIME	OVEN SET	OVEN TEMP	Comments
*	8:40	48	164	Load oven. Purge w/ argon at 50 SCFH (AIR)
-(2)	10:40	"	167	Unload to desiccator. Set oven at "82" (50°C). Cool composite \Rightarrow weight
	-	-	-	Wt = 292.87g \Rightarrow Wt. Pickup = 15.84g \Rightarrow Wt/o Pickup = <u>5.72</u> (Yld = <u>39.5%</u>)
*	13:30	82	246	Load oven; rotate 180°, reverse position. Purge w/ argon at 50 SCFH (AIR)
-(2)	15:30	"	256	Unload to desiccator. Cool overnight + weigh next morning. Oven set "29" (50°C)
	-	-	-	Wt = 291.55g \Rightarrow Wt. Pickup = 14.52g \Rightarrow Wt/o Pickup = <u>5.24</u> (Yld = <u>36.2%</u>)

Comments:

1) After 2 hrs, ~166°C, atm. pressure;

Run-out evident on s.s. screen and in Al pan. Pan + Screen + Run-out = 195.62g \Rightarrow

Cured run-out = 4.55g (ie, ~~Total oven residue = 20.39g \Rightarrow Yld = 50.27%~~)

Set oven at "82" (50°C), Rotate sample 180° and reverse position w/ the "B1" sample.

2) After 2 hrs, ~251°C, atm. pressure;

Set oven to "29" (50°C). Transfer samples to desiccator. Cool overnight and weigh 8/1/01.

Post Curing Data: (8/1/01)

Pan + Screen + Cured Run-out₍₇₎ = 195.71g \Rightarrow Cured Run-out = 4.64g

Wt/o = 291.55g \Rightarrow Wt. Pickup = 14.52g \Rightarrow Wt/o Pickup = 5.24 (Corrected Yld = 36.2%)

\Rightarrow Impregnant Yield (including run-out) = $[(4.64 + 14.52) / 40.08] \times 100 = 47.8%$

Label 195-130-04 * Taken by Dr. Huang w/o label 8/1/01. for machining

\Rightarrow Impregnant Yield (including run-out) 3 Ref. 195-130-06, had to include both wt. pickups for each sample

Performed and Recorded by:

Directed by:

Read and Understood by:

Date

Date

Date

Subject VI + cure (~250°C) of 195-129-98 #4-13-B1 w/195-129-53
Cross-Reference (if any)

(c/c COMP BP). 5

Purpose:

Ref. 195-130-03

Materials:

- c/c Composite: 195-129-98 #4-13-B1 (c/c Composite via BP process. From the 13th block of the 4th Lawrenceburg trial. 0.25" K-223SE Fibers. Reilly 155p. 7ch. Load ratio = 75/25 w/o sulfur. Graphitized to ~3000°C. Note: This material had no PI.
 $Wt_{(c)} = 255.92g$, $Vol_{(c)} = 165.987cc$, $Dens_{(c)} = 1.542 g/cc$
- Impregnant: 195-129-53 (w/50 by vol. GP-5432 / Furfural). Prep. 5/14+15/01. Last Use: 5/17/01. Stored refrigerated. $Wt_{(c)} = 17.4g$ at $74.5^\circ F$, $S.G._{(c)} = 1.188$ at $74.5^\circ F$, % Mod MCL = 34.4 ($\sigma = 0.26$, $n = 3$).

Apparatus:

Ref 195-120-15

Procedure:

Ref. 195-120-15+16 * Proceeded w/195-129-98 #4-13-A1

Pump-down Data:

DATE	TIME	PRESS (mm)	Comments
7/30	7:50	16	Load from warm oven at atm. pressure
"	8:00	"	
"	9:00	30	⇒ samples are dry.
"	11:00	22	Charge traps w/dry ice-acetone.
"	11:35	12	LDR
"	13:15	12	Begin VI

Impregnation Data: (7/30+31/01) - LDR w/traps charged


LDR Initial = 12 mmHg $V_{(c)} = 20.4g$ at $70.8^\circ F$ Drop Time = 13:15 (12 mmHg)
 $5min = 25$ " $S.G._{(c)} = 1.194$ at $70.8^\circ F$ Unload Time = 8:15 (7/31/01)
 $10min = 34$ " Held at atmospheric pressure
 $15min = 44$ " for ~19 hrs

Comments:

400 ml of impregnant in 500 ml cylindrical funnel.

Post Impregnation Data: (7/31/01)

$Wt_{(PVI-1)} = 308.96g \Rightarrow Wt \text{ Pickup} = 53.04g \Rightarrow Wt_{(c)} \text{ Pickup} = 20.73$, $Vol_{(c)} \text{ Pickup} = 26.77$

Performed and Recorded by: 

Directed by: J (low)

Read and Understood by:

Date

Date

Date

6

Subject VE and Cure (vac.) of 195-129-98 #4-13-B1 w/195-129-53 (c/c comp. A)
 Cross-Reference (if any)

Curing Data: (7/31 + 8/1/01) - Cured w/ Vied 195-129-98 #4-13-A1. Samples placed on ss. screen over small Al pan to determine amount of run-out.

Al Pan + Screen Wt = 191.07g

	TIME	OVEN SET	OVEN TEMP	Comments
*	8:40	48	164	Load over. Purge w/ argon at 5.0 SCFH (AIR)
-(2)	10:40	4	167	Unload to desiccator, set over at "82" (50°C). Cool overnight → weigh.
	-	-	-	Wt = 277.36g → Wt Pickup = 21.44g → Wt to Pickup = <u>8.38</u> (Yd = <u>40.4%</u>)
*	13:30	82	246	Load over. Rotate 180°, reverse position. Purge w/ argon at 5.0 SCFH (AIR)
-(2)	15:30	"	256	Unload to desiccator. Cool overnight + weigh next morning. Over set "29" (50°C)
	-	-	-	Wt = 275.68g → Wt Pickup = 19.76g → Wt to Pickup = <u>7.72</u> (Yd = <u>37.3%</u>)

Comments:

1) After 2 hrs, ~166°C, atm. pressure;

Run-out evident on ss screen and in Al pan. Pan + screen + Run-out = 195.62g ⇒
 Cured run-out = 4.55g

Set over at "82" (50°C). Rotate sample 180° and reverse position w/ the "A1" sample.

2) After 2 hrs, vac., atm. pressure;

Set over to "29" (50°C). Transfer samples to desiccator. Cool overnight and weigh 8/1/01.

Post Curing Data: (8/1/01)

Pan + Screen + Cured Run-out: Ref. 195-130-04

Wt_(CF) = 275.68g ⇒ Wt Pickup = 19.76g ⇒ Wt to Pickup = 7.72 (Inv. to Yd = 37.3%)

Label 195-130-06 * Taken by D. Huang w/o label 8/1/01 for machining.

⇒ Impregnant Yield (including run-out from both samples) = $(4.64 + 14.52 + 19.76) / 60.08 +$
 $= (38.92 / 93.12) \times 100 = \underline{41.8\%}$

Performed and Recorded by: 

Directed by: J. (un)

Read and Understood by:

Date

Date

Date

Subject

Cross-Reference (if any)

Initial Data of Graphitized c/c composites via BP Process (4th Trial) (c/c comp BP) 7
Ref. 195-129-48 (comparisons at 3000°C graph temp).

Purpose:

To obtain the initial weights and dimensions prior to vacuum impregnation w/ "T-143" type phenolic/Furfural resin blend for densification.

Materials:

c/c composites via BP process. Rec'd from P. Sirocky 8/7/01. Two sections, both graphitized to ~3200°C. Section "A-2" had one pitch impregnation, section "B-2" did not.

Made w/ 0.25" K-23 SE pitch fibers and Reilly 155 pitch. Load ratio = 75/25. Nic soft fur. Block 13 of 4th Lawrenceburg trial.

Procedure:

Ref. 195-129-98

Initial Data: (8/8/01)

File Path = c:\Program Files\Excel\BP c-composites\Initial.xls Sheet = BP IV (Appendix)

Material:

Material: BP-IV-13 A2 and BP-IV-13 B2. Rec'd 8/07/01. Ultrasonic washed 1x for 5 min. in deionized water on 8/07/01. Dimensions were obtained with a Mitutoyo Model CD-8'CS digital caliper. Hot vacuum dried at 99 °C to 0.1 mm pressure from 8/07 to 8/08/01. Weights obtained on Mettler PN 2210 balance on 8/08/01. Note: Both samples have been graphitized to ~3200°C. A2 has one PI. B2 has no PI.

Sample I.D.	Weight (g)	L1 (mm)	L2 (mm)	L3 (mm)	Ave. Length (mm)	W1 (mm)	W2 (mm)	W3 (mm)	Ave. Width (mm)	H1 (mm)	H2 (mm)	H3 (mm)	Ave. Height (mm)	Vol. (cc)	Den. (g/cc)
4-13-A2	266.87	107.91	108.23	108.10	108.08	93.92	93.98	94.11	94.00	15.16	15.29	15.38	15.28	155.209	1.719
4-13-B2	257.29	107.46	107.84	108.12	107.81	97.75	98.11	98.78	98.21	15.34	15.49	15.34	15.39	162.950	1.579

Dimensioned: 08/08/01
Hot Vac. Dried: 08/07-08/01
Weighed: 08/08/01
N.B. Ref. No. : 195-130-07

*

Impregnation

NB Ref.

4-13-A2 195-129-53 650/50 vol% GP5432/Furfural

195-130-08+09

4-13-B2 " " " " " " " " " " " "

195-130-10+11

Performed and Recorded by:

Directed by:

Read and Understood by:

Date

Date

Date

8 Subject VI of 195-130-07#4-13-A2 w/195-129-53 (50/50 vol/10 GP-5432/Furfural) (6PC comp)
Cross-Reference (if any)

Purpose:

To densify a graphitized c/c composite w/ phenolic / Furfural resin blend. Proposed use is a Li cell.

Materials:

- 1) c/c Composite: 195-130-07#4-13-A2 (c/c composite via BP process. From the 13th block of the 4th Lawrenceburg trial. 0.25" long K-223-SE pitch fibers + Kevlar 155 pitch, Load Ratio = 75% w/o sulfur. Piled & rebaked. Graphitized to $\sim 3200^\circ\text{C}$. $W_{\text{wet}} = 246.87\text{g}$, $V_{\text{load}} = 155.209\text{cc}$, $D_{\text{c/c}} = 1.719\text{g/cc}$
- 2) Impregnant: 195-129-53 (50/50 by vol. GP-5432/Furfural) prep 5/14/15/16. Stored in refrigerator. Last Used: 7/3/01. $V_{\text{vis}} = 17.4\text{cps}$ at 74.5°F , $S_{\text{G,vis}} = 1.188$ at 74.5°F . $1.\text{mil m.c.} = 34.4$ ($\sigma = 0.26, n = 3$).

Apparatus:

Ref. 195-120-15

Procedure:

Ref. 195-120-15 & 16. * Processed w/195-130-07#4-13-A2

Pump-down Data: (8/8 & 9/01)

DATE	TIME	PRESS (mtorr)	Comments
8/8	13:00	18	Load core from hot vac. oven (132°C , 0.4 mm)
"	13:10	"	Begin pump-down
"	14:10	35	
"	16:00	25	
8/9	8:15	22	Charge traps w/ dry ice-acetone.
"	8:40	13	LDR
"	9:45	12	Begin V.I.

Impregnation Data: (8/9 & 10/01) - LDR w/ traps charged

LDR: Initial = 13 millitorr $V_{\text{vis}} = 17.4\text{cps}$ at 77.7°F
 5 min = 25 " $S_{\text{G,vis}} = 1.192$ at 77.7°F
 10 min = 34 "
 15 min = 44 "

Prep Time = 9:45 (12 m to)
 Unload Time = 7:45 8/10/01

Comments:

300 ml of impregnant in the 500 ml cylindrical funnel.

cont'd next page.

Performed and Recorded by:

Directed by:

Read and Understood by:

Date

Date

Date

Subject

Cross-Reference (if any)

VI of 195-130-07 #4-13-A2 w/ 195-129-53

(c/c comp BP)

9

Post Impregnation Data: (8/10/01)

Wt (PVI-1) = 302.75g \Rightarrow Wt. Pickup = 36.08g, \Rightarrow Wt/o Pickup = 13.52, Vol/o Pickup = 19.50

Curing Data: (8/10/01) - Cured w/ vial 195-130-07 #4-13-B2. Samples were placed atop a s.s. screen over a small Al pan. to determine the amount of cured run-out.

Al pan + Screen Wt (g) = 190.85g

	Time	oven Temp	oven Press.	Comments
* (2)	8:05	154	Atm	Load over, Purge w/ argon at 5.0 SCFH (AIR).
- (2)	10:35	150	"	Unload to desiccator. Set over at "82" (50%). Cool composite \Rightarrow weigh.
	-	-	-	Wt = 281.70g \Rightarrow Wt Pickup = 14.83g \Rightarrow Wt/o Pickup = 5.56 (Yld = 41.1%)
* (2)	12:35	248	Atm	Load over; rotate 180°, reverse position. Purge w/ argon at 5.0 SCFH (AIR).
- (2)	14:31	252	"	Unload to desiccator. Set over "29" (50%). Cool \Rightarrow weigh.
	-	-	-	Wt = 280.12g \Rightarrow Wt Pickup = 13.25g \Rightarrow Wt/o Pickup = 4.96 (Yld = 36.7%)

Comments:

1) After 2 1/2 hrs, ~152°C, atm. pressure;

Set over at "82" (50%). Evidence of run-out on the screen and in Al pan.

Rotate sample 180° (Front of Vial). Unload to desiccator \Rightarrow cool \Rightarrow weigh.

2) After 2 hrs, ~200°C, atm. pressure;

Set over at "29" (50%). Unload to desiccator \Rightarrow cool \Rightarrow weigh.

Post Curing Data: (8/10/01)

Pan + Screen + Cured Run-out (g) = 194.79g \Rightarrow Cured run-out = 3.84g

Wt (g) = 280.12g \Rightarrow Wt Pickup = 13.25g \Rightarrow Wt/o Pickup = 4.96, (Insitu % Yld = 36.7)

Label 195-130-07 #4-13-A2 Given to P. Simocky 8/13/01

Impregnate Yield Including Run-out: Ref. 195-130-11

Performed and Recorded by:

Directed by:

Read and Understood by:

Date

Date

Date

10

Subject

vs of 195-130-07 #4-13-B2 w/195-125-53 (50/50 vol% GP-5432/furfural) (ck comp)

Cross-Reference (if any)

Purpose:

Ref. 195-130-08

Materials:

- 1) ck Composite: 195-130-07 #4-13-B2 (ck composite via BP process from the 13th block of 4th Lowrancebury trial. 0.25" long K-223-SE p. Ebfibers + Reilly 15.5 pitch, conditions as in sol for. No PI, Graph D to 3200°C / Wt. 131 = 257.29g, Vol. 131 = 162.95cc, Dens = 1.57
- 2) Impregnant: 195-125-53 (50/50 by vol. GP-5432/furfural). Rep. 5/8/15/16, stored in refrigerator. Last used: 8/10/01, Viscosity = 12.4 cps at 77.7°F, S.G. 131 = 1.192 at 77.7°F
1. Mol. Wt. = 34.4 (M = 0.26, i = 3).

Apparatus:

Ref. 195-120-05

Procedure:

Ref. 195-120-15+16 * Processed w/ 195-130-08 #4-13-B2

Pump Down Data: (8/08+09/01)

DATE	TIME	PROB (min)	Comments
8/8	13:00	18	Load sample from hot oven (132°C, 0.4 min)
"	13:10	"	Begin pump down.
"	14:00	35	
"	16:00	25	
8/9	8:15	22	Charge traps w/ Dryice-acetone
"	8:40	13	LDR
"	9:45	12	Begin VI

Impregnation Data: (8/09+10/01) - LDR w/ traps charged?

LDR: Initial = 13 min / Viscosity = 17.9 cps at 77.7°F

5 min = 25 " S.G. 131 = 1.192 at 77.7°F

10 min = 34 "

15 min = 44 "

Drop Time = 9:45 0.2 mi

Unload Time = 7:45 (8/10/01)

Held at atmospheric pressure

~ 12 hrs.

Comments:

300 ml of impregnant in the 500 ml cylindrical funnel.

Post Impregnation Data: (8/10/01)

Wt (crv. 131) = 308.14g, \Rightarrow Wt Pickup = 50.85g \Rightarrow Wt to Pickup = 19.76, Vol to Pickup = 26.19

Performed and Recorded by:

Directed by:

Read and Understood by:

Date

Date

Date

Subject VI of 195-130-07 #4-13-B2 w/195-129-53 (50/50 V₂ 1/6 GP-5432/Perforal) (c/c comp BP) 11
 Cross-Reference (if any)

Curing Data: (8/10/01) - cured w/ VI of 195-130-07 #4-13-B2. Samples were placed atop a s.s. screen over a small Al pan. to determine the amount of cured run-out.

Al pan + screen wt = 190.95g

	TIME	OVEN TEMP	PRESS (mm)	Comments
*	8:05	154	Atm	Load over. Purge w/argon at 5.0 SCFH (AIR). Oven set at "48" (58%).
-(2)	10:35	150	"	Unload to desiccator. Set oven at "82" (50%). Purge w/argon at 5.0 SCFH (AIR)
	-	-	-	Wt = 278.68g \Rightarrow Wt Pickup = 21.39g \Rightarrow Wt to Pickup = <u>8.31</u> (Yd = <u>42.1%</u>)
*	12:35	248	Atm	Load over; rotate 180°, reverse position. Purge w/argon at 5.0 SCFH (AIR).
-(2)	14:35	252	"	Unload to desiccator. Set oven at "29" (50%). Cool \Rightarrow weigh.
	-	-	-	Wt = 276.35g \Rightarrow Wt Pickup = 19.06g \Rightarrow Wt to Pickup = <u>7.41</u> (Yd = <u>37.5%</u>)

Comments:

1) After 2 1/2 hrs, ~152°C, atm. pressure;
 Set oven at "82" (50%). Evidence of run-out on the screen + in the Al pan.
 Rotate sample 180° (rear of oven). Unload to desiccator \Rightarrow cool \Rightarrow weigh.

2) After 2 hrs, ~250°C, atm. pressure;
 Set oven at "29" (50%). Unload to desiccator \Rightarrow cool \Rightarrow weigh.

Post Curing Data: (8/10/01)

Pan + Screen + Cured Run-out (cr) = 194.79g \Rightarrow Cured Run-out = 3.84g

Wt (cr) = 276.35g \Rightarrow Wt Pickup = 19.06g \Rightarrow Wt to Pickup = (7.41) (Insitu % Yd = 37.5%)

Impregnant Yield (including run-out) = $[(3.84 + 19.06 + 13.25) / (36.08 + 50.85)] \times 100$
 $= (36.15 / 86.93) \times 100 = 41.6%$

this agrees well w/ impregnant yield from A1 + B1 samples
 Ref. 195-130-06 (i.e. 41.8% yield).

Labeled 195-130-11 #4-13-B2 Given to P. Sirocky 8/13/01

Performed and Recorded by:
 Directed by:
 Read and Understood by:

Date
 Date
 Date

Subject *Graphitic treatment of* 145-129-93 #3-1-B, 145-129-100 #3-2-A, & 145-132-02 #3-2-B (alc.com) 63
Cross-Reference (if any) *BP*

For convenience samples are red labeled 195-130-62 # 3-1-B, 3-2-A, & 3-2-B.
Returned to F. S. Drecky 10/01/01.

Material:

195-130-63 # 3-1-B: Previously 195-129-93 # 3-1-B; c/c composite via RF process from the 1st block of the 3rd Lawrenceburg trial. 0.25" long K-223-SE pitch fibers and Rayley 175 pitch. Load ratio = 75/25. No sulfur. Visc w/ silica oxide colloidal dispersion. It \Rightarrow vacuum dried to 160°C to 0.4 mm. wt = 822.45g, Vol = 554.50 cc, Dens = 1.485g/cc.
wt (moist) = 863.85g

Graph Cycle:

Held 5 hrs at $\sim 1690^{\circ}\text{C}$ \rightarrow 1 hr at $\sim 2000^{\circ}\text{C}$. Block wrapped in Grafoil sheet.

Graph Run Data:

RUN NO. 2 OF 4

NO. PIECES 1

OPERATOR HARRIS M: KJ

SIZE

N2_____

1 2

RATE FAST TO 1690 hold 5 hr 300R to 2000

ARGON _____

0 - 2400	SCHED.	ACTUAL
HR. TIME	TEMP.	TEMP.

GROUND 46.6 1 hr
CURRENT 2.85

HR. TIME	TEMP.	TEMP.	VOLTS	AMPS	% KW
----------	-------	-------	-------	------	------

CURRENT 285 FREQ. 425

[illegible]

Performed and Recorded by:

Directed by:

Read and Understood by:

Date _____

Date

Date _____

64

Subject

Cross-Reference (if any)

Graphite content of 195-129-93 #3-1-B, 195-129-100 #3-2-A, + 195-130-02 #3-2-B

Post Graph Comments:

Very little SiC on the sample. Same is true for the graphite wrap.

Material:

195-130-63 #3-2-A: Previously 195-129-100 #3-1-A: c/c composite via BP process from 2nd block of the 3rd Lawrenceburg trials. 0.25" long K-223-SE pitch fibers and Reilly 10 pitch. Load Ratio = 20/25. No sulfur. Vied w/ silicon oxide colloidal dispersion 2x = hot vacuum dried after each VJ. Final vac dry (166°C, 0.3 mm). Wt (as) = 867.13g. Vol (as) = 556.247g/cc, Density (as) = 1.557g/cc, Wt (PVD-23) = 926.16g

Graph Cycle:

Held 5 hrs at ~1700°C ⇒ 1 hr hold at ~2400°C. Block wrapped in Graphite sheet.

Graph Run Data:

COIL NO. 10DATE 9-20-01SUBMITTER D. HUANGRUN NO. 3 OF 4NO. PIECES 1OPERATOR JIM HARTEN MIKE

SIZE _____

N2 _____

① 2

RATE 1700° 5 hrs → 2400° 1 hr

ARGON _____

0-2400 SCHED. ACTUAL
HR. TIME TEMP. TEMP.

VOLTS

AMPS

% KW

GROUND

CURRENT

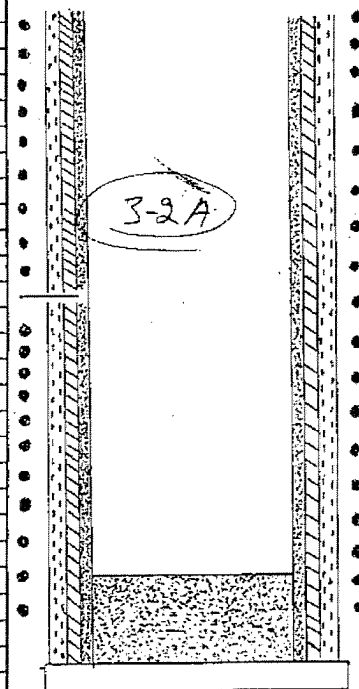
FREQ. 428

2	RT	20	27	15	7
3	700	670 X	40	21	15
4	1200	1210	53	25	23
5	1700	1695	64	32	32
6	1700	1695	47	23	19
7	1700	1690	45	21	17
8	1700	1705	44	21	17
9	1700	1700	43	21	16
10	1700	1705	44	21	17
11	2050	2110	69	35	35
1195	2400	2400	81	47	47
1245	2400	2405	67	34	33

LOADING DIAGRAM

COMMENTS

x 785g

Performed and Recorded by: J. HartenDirected by: J. Chen

Read and Understood by: _____

Date, _____

Date _____

Date _____

(SLC Comp BP) 6

Most visible SiC on surfaces of the block of the three samples run here.
Appreciably more SiC on the Gratiol Wrap than the block taken to 2000°C.

195-130-63 #3-2-B: Previously 195-130-02 #3-2-A: ck composite via BP process from the 2nd block of the 3rd Lawrenceburg trial. 0.25" long K-223-SE pitch fibers and Reiley 155 pitch. Load Ratio = 75/25. No sul fur. Vied w/ silic on oxide colloidal dispersion 2x \Rightarrow hot vacuum dried after each VJ. Final vac dry (146°C, 0.3mm). Wt_{cr1} = 861.58g, Vol_{cr1} = 571.400cc, Dens_{cr1} = 1.508g/cc, Wt_(prv-2) = 929.57g

Held Stems at $\sim 1700^\circ\text{C}$ \Rightarrow 1 hr hold at $\sim 2600^\circ\text{C}$. Block wrapped in Grafoil sheet.

COIL NO. 10

DATE 7-25-01

SUBMITTER P. HILLING

RUN NO. 474

NO. PIECES /

OPERATOR JIM-HARRIS-MIKE

SIZE

N 2

1 2

RATE FAST 1700' HOLD SHRS 300'/HR \rightarrow 2600'

ARGON

0 - 2400	SCHED.	ACTUAL
1	1	1
2	2	2
3	3	3
4	4	4
5	5	5
6	6	6
7	7	7
8	8	8
9	9	9
10	10	10
11	11	11
12	12	12
13	13	13
14	14	14
15	15	15
16	16	16
17	17	17
18	18	18
19	19	19
20	20	20
21	21	21
22	22	22
23	23	23
24	24	24
25	25	25
26	26	26
27	27	27
28	28	28
29	29	29
30	30	30
31	31	31
32	32	32
33	33	33
34	34	34
35	35	35
36	36	36
37	37	37
38	38	38
39	39	39
40	40	40
41	41	41
42	42	42
43	43	43
44	44	44
45	45	45
46	46	46
47	47	47
48	48	48
49	49	49
50	50	50
51	51	51
52	52	52
53	53	53
54	54	54
55	55	55
56	56	56
57	57	57
58	58	58
59	59	59
60	60	60
61	61	61
62	62	62
63	63	63
64	64	64
65	65	65
66	66	66
67	67	67
68	68	68
69	69	69
70	70	70
71	71	71
72	72	72
73	73	73
74	74	74
75	75	75
76	76	76
77	77	77
78	78	78
79	79	79
80	80	80
81	81	81
82	82	82
83	83	83
84	84	84
85	85	85
86	86	86
87	87	87
88	88	88
89	89	89
90	90	90
91	91	91
92	92	92
93	93	93
94	94	94
95	95	95
96	96	96
97	97	97
98	98	98
99	99	99
100	100	100

GROUND

HR TIME

SCHED.

ACTUAL

VOLTS

AMPS



0/ KN

ENT

302

• EDEO

191

Performed and Recorded by: 
Directed by: 
Read and Understood by:

Date /
Date
Date

Subject *Graph of 195-129-43 #3-1-B, 195-129-100 #3-2-A, + 195-130-02 #3-2-B (c/c comp BP)*
 Cross-Reference (if any)

Post Graph Comments:

Visible SiC on sample's surfaces. Possibly less than 195-130-63 #3-2-A.
 Of three samples this material had the most coating of SiC on the Grafoil
 wrap. The Grafoil wrap was given to J. Norley to evaluate potential of SiC
 coated Grafoil.

Post Graph Data: (9/28/01)

File Path = C:\Program Files\Excel\BP C-C Composites\Post Graph.xls Sheet = BP III

BP C/C COMPOSITES POST GRAPH WEIGHTS AND DIMENSIONS

Material:

Material: BP-III-1 and BP-III-2. Rec'd 09/28/01. Samples not washed (ie. Vac oven out of order).
 Dimensions were obtained with a Starrett No. 123-12 vernier caliper.
 Weights obtained on Mettler PN 2210 balance on 9/28/01.

Sample I.D.	Weight (g)	L1 (in.)	L2 (in.)	L3 (in.)	Ave. Length (in.)	W1 (in.)	W2 (in.)	W3 (in.)	Ave. Width (in.)	H1 (in.)	H2 (in.)	H3 (in.)	Ave. Height (in.)	Vol. (cc)	Dens. (g/cc)
3-1-B	810.66	8.267	8.277	8.285	8.277	3.259	3.319	3.327	3.305	1.254	1.149	1.228	1.210	542.540	1.494
3-2-A	852.69	8.939	8.938	8.956	8.944	3.245	3.304	3.316	3.288	1.209	1.119	1.195	1.174	565.998	1.507
3-2-B	836.79	8.978	8.982	8.993	8.984	3.295	3.332	3.324	3.317	1.162	1.165	1.165	1.164	568.439	1.472

Dimensioned: 09/28/01

Hot Vac. Dried: N/A

Weighed: 09/28/01

N.B. Ref. No. : 195-130-63

Sample I.D.	Initial through Graph						Post Vacuum Dry through Graph					
	Wt/o	Len/o	W/o	H/o	Vol/o	Dens/o	Wt/o	Len/o	W/o	H/o	Vol/o	Dens/o
3-1-B	-1.58	0.96	1.01	-4.12	-2.16	0.61	-6.16	NM	NM	NM	NM	1.228
3-2-A	-1.67	0.94	0.77	0.00	1.75	-3.34	-7.93	NM	NM	NM	NM	1.195
3-2-B	-2.88	0.89	1.16	-2.51	-0.52	-2.39	-9.98	NM	NM	NM	NM	1.165

Comments:

Dimensionally the sample shrinks in thickness (ie. height). This results
 in expansion in the other two directions.

No where near 1.70 final density desired.

Samples Returned to P. Strackey 10/01/01.

Performed and Recorded by: *[Signature]*

Directed by: *[Signature]*

Read and Understood by:

Date

Date

Date

Subject: Initial Data - C/C Composite via BP Process (1st Trial - no graph) (C/C Comp BP) 79
Cross-Reference (if any)

Purpose:

To obtain the initial weights & dimensions prior to vacuum impregnation w/ "T-143" type phenolic/furfural resin blend for densification.

Material:

C/C composite via BP process. Rec'd from P. S. Rocky 10/23/01. This was a slab from the 7th brick of the 1st trial. Slab was not graphitized. Made w/ 0.25" K-223-SE pitch fibers, Reilly NS pitch, and sulfur. The load ratio = 75/25 + 50 wt% of pitch sulfur.

Procedure:

Ultrasonic washed in deionized water 3x, 5 min intervals \Rightarrow Vacuum dried overnight in National Vac. Oven (E-15) overnight at $\sim 98^{\circ}\text{C}$ to 0.5 mm pressure. Cooled to R.T. in desiccator \Rightarrow weighed.

Initial Data: (10/23+24/01)

File Path = C:\Program Files\Excel\BP C-C Composites\Initial.xls Sheet = BP I

BP C/C COMPOSITES INITIAL WEIGHTS AND DIMENSIONS

Material:

Material: BP-I-7: not graphitized. Rec'd 10/23/01. Ultrasonic washed 3x for 5 min. in deionized water on 10/23/01. Dimensions were obtained with a Starrett No. 123-12 vernier caliper. Hot vacuum dried at 98°C to 0.5 mm pressure from 10/23 to 10/24/01. Weights obtained on Mettler PN 2210 balance on 10/24/01.

Sample I.D.	Weight (g)	L1 (in.)	L2 (in.)	L3 (in.)	Ave. Length (in.)	W1 (in.)	W2 (in.)	W3 (in.)	Ave. Width (in.)	H1 (in.)	H2 (in.)	H3 (in.)	Ave. Height (in.)	Vol. (cc)	Den. (g/cc)
1-7-A	429.50	8.060	8.050	8.042	8.051	2.648	2.677	2.703	2.676	0.836	0.795	0.750	0.794	280.192	1.533

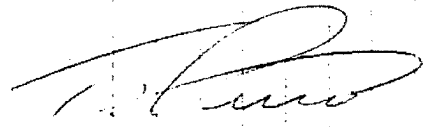
Dimensioned: 10/23/01

Hot Vac. Dried: 10/23-10/24/01

Weighed: 10/24/01

N.B. Ref. No. : 195-130-79

1st VI w/ T-143: Ref. 195-130-81+82

Performed and Recorded by: 
Directed by: J.C. Curran
Read and Understood by:

Date
Date
Date

80

Subject Preparation of ~800 ml of sol'n by Vol GP-5432 for final
Cross-Reference (if any) Previous treat: Ref 195-129-53

(calc comp B)

Purpose:

To ensure enough impregnant for 2 VIs of 195-130-79 #1-7A. This will be combined w/ 195-129-53 prior to impregnation.

Materials:

GP-5432, Lot # 19588, Rec'd from Georgia-Pacific 9/24/96, LIMS # A96-03635
Stored in freezer in E-13, Ave % Mac MCC = 48.6 ($\sigma = 6.37, n=3$), Brookfield
RT Viscosity = 157.3 cP at 74.0°F , PDS Data: 2F, 15F, 105F, 49, To A Visc
(900°C) = 47.5% , Brookfield Visc (5/14/01) = 283.5 cP at 68.7°F .

Forfural: Reagent Grade (Fisher), Rec'd 5/15/01, 12" bottle, Use ~250 ml
⇒ Balance = ~640 ml.

Preparation: (10/25/01) - 1L Erlenmeyer Flask, 250 ml GP-5432 + 250 ml Forfural
Stir for ~30 min, & topped off ⇒ combine w/ 195-129-53
Obtain Brookfield (LVT) RT viscosity and RT Specific Gravity

FLASK (exc) + GP-5432 wt = 734.0	FLASK (exc) + Forfural wt = 1020.3
FLASK (exc) wt = 430.8	FLASK (exc) wt = 734.0
~250 ml GP-5432 wt = 303.2 g	~250 ml Forfural wt = 286.3 g ⇒ <u>51.4% by wt GP-5432</u>

Mix w/o heat for ~30 min ⇒ combine w/ 195-129-53

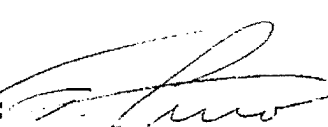
Brookfield (LVT) RT Viscosity: (10/25/01)

Viscosity = 19.9 cP at 74.2°F Spindle #1, CORPM, Factor = 1

Specific Gravity at RT: (10/25/01)

S.G. = 1.194 at 74.2°F

Label combined solutions 195-130-80. Store in refrigerator when not in use.

Performed and Recorded by: 
Directed by: J. Chiu
Read and Understood by:

Date
Date
Date

Subject, 1st VI of 195-130-79 #1-7-A w/195-130-80 (sol/sol by vol GP-5432/FurFural) (c/camp BP) 81
Cross-Reference (if any)

Purpose:

To density c/c composite produced via BP process. Note: this composite has not been graphitized.

Materials:

- 1) c/c Composite: 195-130-79 #1-7-A (c/c composite via BP process) Rec'd From P. Smocky 10/23/01
 (7th block of 1st Lawrence buty Trial, not graphitized), 0.25" long K-223-SE pitch fibers
 : Reilley 105 pitch + sulfur. Load ratio = 75/25 + 5 gp H wt/o of pitch = 50 Hwt
 $W_{LW} = 429.50g$, $V_{LW} = 280.192cc$, $D_{LW} = 1.533g/cc$
- 2) Impregnant: 195-130-80 (sol/sol by volume GP-5432/FurFural). Prep. 5/14/01. Refrigerated.
 Add'l sol'n (Y/N): 195-130-80 and combined. Last Used: 8/10/01. New Initial Data:
 $V_{isc} = 19.9cP$ at $74.2^{\circ}F$, $S.G. = 1.194$ at $74.2^{\circ}F$

Apparatus:

Ref. 195-120-15

Procedure:

Ref. 195-120-15+16

Pump-down Data: (10/24+25/01)

DATE	TIME	PRESS (mTorr)	Comments
10/24	13:25	9	Load core from desiccator.
"	13:35	"	Begin pump-down
"	14:45	26	
"	16:00	18	
10/25	7:25	12	
"	9:05	13	Charge traps w/dry ice-acetone
"	9:35	7	LDR
"	11:45	6	Begin VI

Impregnation Data: (10/25+26/01) - LDR w/traps charged

LDR: Initial = 7 mTorr $V_{isc} = 19.9cP$ at $74.2^{\circ}F$ Drop Time = 11:45 (6 mTorr)
 5min = 16 " $S.G. = 1.194$ at $74.2^{\circ}F$ Unload Time = 8:45 (10/26/01)
 10min = 23 " Held at atmospheric pressure
 15min = 30 " for ~ 21 hrs.

Comments:

500 ml cylindrical Funnel is full (ie ~640 cc). ~30 ml returned to 16 oz bottle.
 ⇒ plenty for at least 3 more VIs.

cont'd next page

Performed and Recorded by:

Directed by: J (lw)

Read and Understood by:

Date,
 Date
 Date

Post Integration Data: (10/26/01)

 $\text{Wt (PVI-1)} = 494.21\text{g} \Rightarrow \text{Wt. Pickup} = 61.81\text{g} \Rightarrow \text{Wt. Pickup} = 15.09, \text{Vol. Pickup} = 19.62$
 $\text{Al Pwt + Sample Wt} = 196.94\text{g}$
Curing Data: (10/26/01) - Placed atop s.s. screen over small Al pan. Held ~2 hrs at $\sim 150^\circ\text{C} \Rightarrow \sim 2 \text{ hrs at } \sim 250^\circ\text{C}$, purged at 20 SCFH (AIR) w/ dry air throughout.
Final Use of Fisher Scientific Iso temp Vacuum Oven (Model #282A).

	Time	Cure Temp	Press	Comments
+	4:00	153	Atm	Load oven, Over set at 153°C . Purge nitrogen at 20 SCFH (AIR)
- (X)	11:00	153	"	Unload in desiccator. Set oven at 250°C
-	-	-	-	Wt = 462.86g \Rightarrow Wt. Pickup = 33.36g \Rightarrow Wt. Pickup = 7.77 (Vol = 51.5%)
+	12:00	275	Atm	Load oven, rotate 180. Set oven at 250°C . Purge nitrogen at 20 SCFH (AIR)
- (X)	14:00	275	"	Unload in desiccator. Set oven at 100°C . Allow sample to cool through
-	-	-	-	Wt = 457.84g \Rightarrow Wt. Pickup = 28.34g \Rightarrow Wt. Pickup = 6.66 (Vol = 43.5%)

Comments:

 1) After 2 hrs, $\sim 153^\circ\text{C}$, at pressure;
 Set oven at 250°C . Screened and captured minor amount of cured resin \Rightarrow run-out. Top surface had curved "bubbles", while bottom surface had curved "droplets". Rotate 180. (i.e. droplets to top).

 1) After 2 hrs, $\sim 275^\circ\text{C}$, at pressure;
 Set oven to 100°C . Unload in desiccator \Rightarrow cool \Rightarrow weigh. Sample "bubbled" "droplets" from composite surface \Rightarrow reweigh. Store in desiccator over weekend. Load into oven at 100°C at 10/29/01.

Post Cure Data:

 Sample scrapped \Rightarrow reweighed.

 $\text{Wt} = 479.58\text{g} \Rightarrow \text{Wt. Pickup} = 28.08\text{g} \Rightarrow \text{Wt. Pickup} = 6.89, \text{Vol. Pickup} = 43.3\%$
 $\text{Resin + cured Resin (Wt)} = 196.28\text{g} \Rightarrow \text{Cured content} = 0.24\text{g}$

 Total Cured Resin (includes cured resin scrapped from composite) = $0.24 + 0.10\text{g} = 0.34\text{g}$
 $\text{Impregnated Field (including run-out + scrapings)} = [60.66\text{g} + 28.08\text{g}] / 61.81\text{g} \times 100 = 44.3\%$
 $\text{2nd VI: Ref. } 195-130-85+86$
Performed and Recorded by:
Directed by:
Read and Understood by:
Date
Date
Date

Subject 2nd VT of 195-130-82#1-7-A w/195-130-80 (50/50 vol/6 GP-5432 / Futural) (c/c comp BP) 85
 Cross-Reference (if any)

Purpose:

Ref. 195-130-81

Materials:

- 1) c/c composite via BP process: 195-130-82#1-7-A, Rec'd from P. Sirocky 10/23/01. (7th Block of 1st Lawrenceburg Trial; not graphitized). 0.25" long K-223-SE pitch fibers, Reiley 155 pitch, sulfur, Load Ratio = 72/25 + 5ppH wt% of pitch = sulfur. Vied and cured 1x w/195-130-80. Wt(wt) = 429.50g, Vol(wt) = 280.192cc, Dens = 1.533g/cc, Wt(PVP-1) = 457.58g, Current Den = 1.633g/cc
- 2) Impregnant: 195-130-80 (50/50 by volume GP-5432 / Futural) Prep. 5/14/01 and 10/25/01. Last Used: 10/20/01. Viscosity = 19.9 cps at 74.2°F, S.G. = 1.194 at 74.2°F. Refrigerated when not in use.

Apparatus:

Ref. 195-120-15

Procedure:

Ref. 195-120-15+16

Pump-down Data: (10/29+30/01)

DATE	TIME	PRESS (mTorr)	Comments
10/29	8:30	9	Load core from warm over; ~94°C, atm. pressure.
"	8:40	"	Begin pump-down
"	9:40	105	
"	10:00	46	
10/30	7:30	26	
"	8:10	27	Charge traps w/ dry ice-acetone
"	9:15	18	LDR
"	11:45	18	Begin VI

Impregnation Data: (10/30+31/01) - LDR w/ traps charged.

LDR: Initial = 18 mTorr Viscosity = 18.7 cps at 76.9°F Drop Time = 11:45 (18 mTorr)
 5min = 35 " S.G. = 1.193 at 76.9°F Unload Time = 8:45 (10/31/01)
 10min = 47 " Held at atmospheric pressure for
 15min = 53 " ~ 21 hrs.

Comments:

~610ml in 500cc. cylindrical Funnel → Enough for another impregnation.

Post Impregnation Data: (10/31/01)

Wt (PVP-2) = 491.45g ⇒ Wt. Pickup = 33.87g ⇒ Wt to Pickup = 7.40, Vol to Pickup = 10.13

Performed and Recorded by: [Signature]

Directed by: [Signature]

Read and Understood by:

Date

Date

Date

Subject 2^{nd} VI of 195-130-82 #1-7-A w/195-130-86 (GELU vials GR 532 (Air Dry) (2k comp BP)
 Cross-Reference (if any)

Curing Data: (10/31/01).

Procedure: Ref. 195-130-82

Atm + Screen wt = 190.97g

	TIME	OVEN TEMP	PRESS (mm)	Comments
*	8:55	156	Atm	Load oven, Oven set <u>155°C</u> . Purge whenever at 5.0 (with Air).
(2)	10:55	154	"	Unload to desiccator. Set oven at <u>265°C</u> . Wt = 480.63g \Rightarrow Wt Pickup = 23.25g \Rightarrow Wt/c Pickup = 5.08 (Yld = <u>68.6%</u>)
*	12:00	275	Atm	Load oven, rotate 180°. Set oven at <u>260°C</u> , Purge whenever at 5.0 (with Air).
(2)	14:00	271	"	Unload to desiccator. Set oven at <u>105°C</u> . Allow sample to cool \Rightarrow cool \Rightarrow cool \Rightarrow cool Wt = 476.25g \Rightarrow Wt Pickup = 21.87g \Rightarrow Wt/c Pickup = 4.09 (Yld = <u>55.2%</u>)

Remarks:

1) After 2hrs, 155°C, atm pressure;

Set oven at 265°C. Transfer to desiccator \Rightarrow cool \Rightarrow weigh. Composite has numerous cured resin bubbles on all surfaces. Rotate 180°.

2) After 2hrs, 275°C, atm. pressure;

Set oven at 105°C. Transfer to desiccator. Cool \Rightarrow weigh \Rightarrow scrape "bubbles" \Rightarrow reweigh. Store in desiccator.

Post Cure Data: (10/31/01)

Sample scraped \Rightarrow reweighed!

Final Wt = 474.63g \Rightarrow Wt Pickup = 17.05g \Rightarrow Wt/c Pickup = 3.73 Yield = 58.3%

Run + Screen (Cured) Run-out = 191.18g \Rightarrow Cured Run-out = 0.31g

Total Cured Run-out (includes cured resin scraped from composite) = 0.21 + 1.06 = 1.87

Ingrain Yield (includes Run-out scraping) = $[(1.87 + 17.05) / 33.87] \times 100 = \underline{55.9\%}$

Cumulative Wt Pickup = 45.13g \Rightarrow Cumulative Wt/c Pickup = 10.51

Label in plastic bag: 195-130-86 # 1-7-A.

Performed and Recorded by: 

Directed by: 

Read and Understood by:

Date

Date

Date